Amplified Inductive Sensors 08





AMPLIFIED INDUCTIVE SENSORS INCREASED RANGE 10÷30 VDC 3 WIRES NPN OR PNP OUTPUT

- Three-wire sensors
- Increased range, shielded, not shielded
- Range, 2 mm to 3 mm
- Short housing models
- 200mA NPN or PNP
- Operation LED
 Cable or M8 and M12 quick connect models


IS Series








Identification code

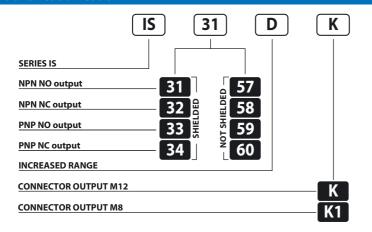


| | SHIELDED | NOT SHIELDED | |
|---------------------------------|---|-------------------------|--|
| NOMINAL SWITCHING DISTANCE (Sn) | 2 mm | 3 mm | |
| NOMINAL VOLTAGE | 10 ÷ 30 VDC | 0 ÷ 30 VDC (-15 / +10%) | |
| RESIDUAL RIPPLE | ≤ 1 | ≤ 10% | |
| HYSTERESIS | < 1 | < 10% | |
| MAX. OUTPUT CURRENT | 200 | 200 mA | |
| RESIDUAL CURRENT | < 10 mA | | |
| VOLTAGE DROP (Sensor ON) | < 1.2 V (I = 100 mA) | | |
| OPERATION LED | Yellow | | |
| SWITCHING FREQUENCY | 500 Hz | | |
| START UP DELAY | ≤ 75 mS | | |
| REPEATABILITY | ≤ 3% | | |
| SHORT CIRCUIT PROTECTION | Present (self-resetting) | | |
| ELECTRIC PROTECTIONS | Against polarity reversal - inductive loads | | |
| TEMPERATURE LIMITS | - 25 ÷ +70 °C | | |
| PROTECTION DEGREE | IP 67 | | |
| CABLE LENGTH | 2 m | | |
| CABLE SECTION | 3 x 0,14 mm ² | | |
| HOUSING MATERIAL | Nickel-plated brass | | |
| WEIGHT - Cable output - | 80 g | | |
| WEIGHT - K1 connector output - | 40 g | | |
| WEIGHT - K connector output - | 55 g | | |

Wiring diagrams

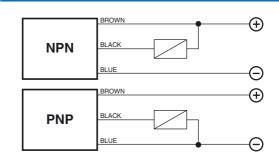

Connection with connector M12 (K)




View of quadripole male connector.

CONFIGURAZIONE CONTATTI

| | Available | | Contacts | numbers | |
|--|------------|---|----------|---------|-------|
| | | 1 | 2 | 3 | 4 |
| | (NO or NC) | + | | _ | NO/NC |

Connection with connector M8 (K1)





View of tripole male connector.


CONTACTS CONFIGURATION

| Available | Con | Contacts numbers | | |
|------------|-----|------------------|-------|--|
| Available | 1 | 3 | 4 | |
| (NO or NC) | + | _ | NO/NC | |

Dimensions (mm)



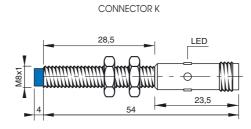



Note: the front part in blue refers to not shielded models