



# Inductive Sensors Ø 18



INDUCTIVE SENSORS CONFORMING TO NAMUR RULES AND ATEX DIRECTIVE


- Two-wire sensors
- 5-24 VDC input
- Nickel plated brass
- Shielded versions up to 5 mm
- Not shielded versions up to 8 mm
- Cable or M12 quick connect models

IS Series


New



## Identification code

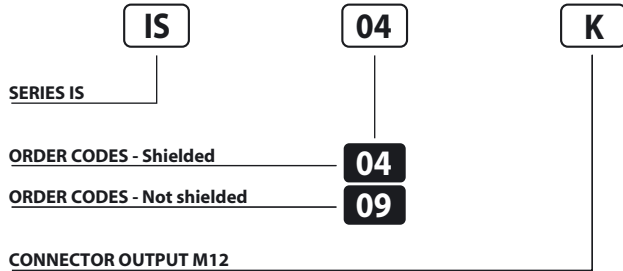


## Wiring diagrams

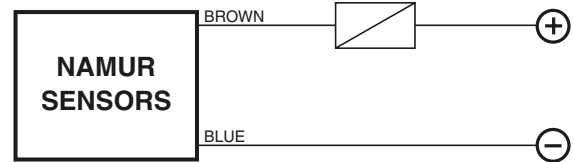

	SHIELDED	NOT SHIELDED
NOMINAL SWITCHING DISTANCE (Sn)	5 mm	8 mm
NOMINAL VOLTAGE (Load resistance 1 K)	7.7 ÷ 9 V DC	
DC SUPPLY VOLTAGE	5 ÷ 24 V DC	
RESIDUAL RIPPLE	≤ 10%	
HYSTERESIS	≤ 10%	
OUTPUT CURRENT (Metal present)	≤ 1 mA	
OUTPUT CURRENT (Metal absent)	≤ 3 mA	
SWITCHING FREQUENCY	1000 Hz	
REPEATABILITY	≤ 3%	
TEMPERATURE LIMITS	-25 ÷ +60 °C	
PROTECTION DEGREE	IP 67	
DEVICE MARKING	Ⓔ II 3D IP67 T6X	
CABLE LENGTH	2 m	
CABLE SECTION	2 x 0.25 mm <sup>2</sup>	
HOUSING MATERIAL	Nickel-plated brass	
WEIGHT - Cable output -	145 g	
WEIGHT - K connector output -	95 g	

## Connection with connector M12 (K)





View of quadripole male connector

## CONTACTS CONFIGURATION

Available	Contacts numbers			
	1	2	3	4
NAMUR	+		-	

## Dimensions (mm)

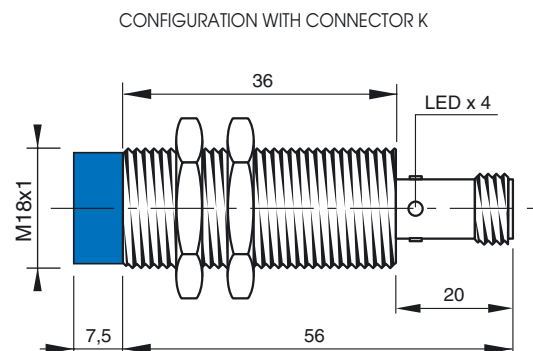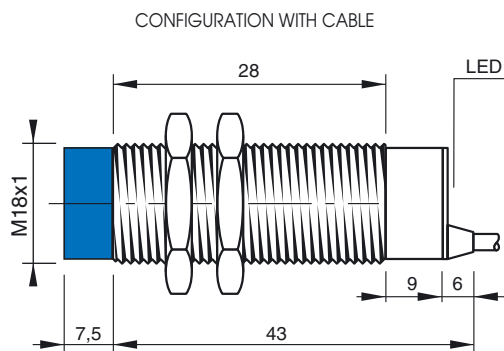

Note: The front part in blue refers to not shielded models