

Amplified Inductive Sensors 930





AMPLIFIED INDUCTIVE SENSORS INCREASED RANGE 10÷30 V DC 2 WIRES NO-NC PROGRAMMABLE OUTPUT

- Two-wire sensors
- Increased range, shielded, not shielded 10 to 30 VDC Range, 15 mm to 20 mm NO or NC select

- Cable or M12 quick connect models
- Nickel plated brass


IS Series








Identification code

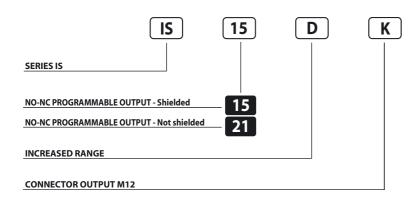


	SHIELDED	NOT SHIELDED		
NOMINAL SWITCHING DISTANCE (Sn)	15 mm	20 mm		
NOMINAL VOLTAGE	10 ÷ 30 VDC (-15 / +10%)			
RESIDUAL RIPPLE	≤ 10%			
HYSTERESIS	< 10%			
MAX. OUTPUT CURRENT	100	100 mA		
MIN. OUTPUT CURRENT	> 1,6 mA			
RESIDUAL CURRENT	< 1,6 mA			
VOLTAGE DROP	< 6,5 V (I = 100 mA)			
OPERATION LED	Yellow			
SWITCHING FREQUENCY	200 Hz			
START UP DELAY	≤ 50 mS			
REPEATABILITY	≤ 3%			
SHORT CIRCUIT PROTECTION	Present (self-resetting)			
ELECTRIC PROTECTIONS	Against polarity reversal - inductive loads			
TEMPERATURE LIMITS	- 25 ÷ +70 °C			
PROTECTION DEGREE	IP 67			
CABLE LENGTH	2 m			
CABLE SECTION	2 x 0.25 mm ²			
HOUSING MATERIAL	Nickel-plated brass			
WEIGHT - Cable output -	210 g			
WEIGHT - K connector output -	170 g			

Wiring diagrams

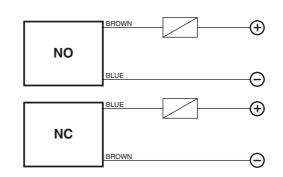

WARNING: The load can be indifferently connected in series to the blue wire or to the brown wire to simulate NPN or PNP functionning logic.

Connection with connector M12 (K)




View of quadripole male connector

CONTACTS CONFIGURATION

Available	Contacts numbers			
	1	2	3	4
NO	+		_	
NC	_		+	

Dimensions (mm)

CONFIGURATION WITH CABLE

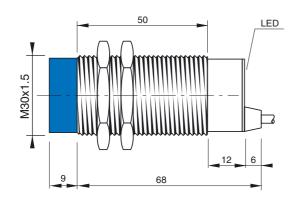

M30x1.5

CONFIGURATION WITH CONNECTOR K 53

Note: the front part in blue refers to not shielded models

LED x 4

20